

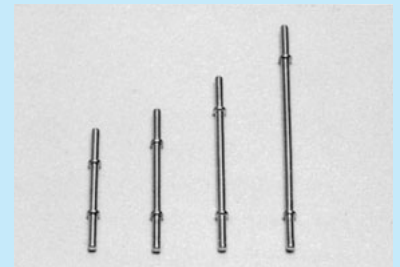


For two-tiered installation (fixed type) [DC series] (1000pcs/pack)


- This is used for mounting PC boards by two-tiered installation.
- Both the main board and the slave board are fixed by soldering.
- Material: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 5A
- Printed board fitting hole diameter: ϕ 0.8



Part number	L (mm)
DC- 1	1
DC- 2	2
DC- 3	3
DC- 4	4
DC- 5	5
DC- 6	6
DC- 7	7
DC- 8	8
DC- 9	9
DC-10	10
DC-12.5	12.5
DC-15	15
DC-17.5	17.5
DC-20	20
DC-25	25

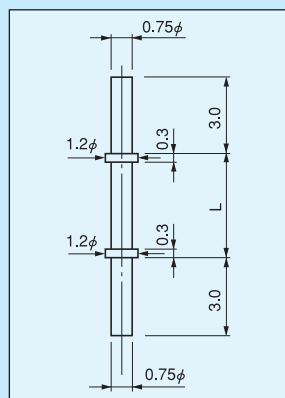

Example of usage

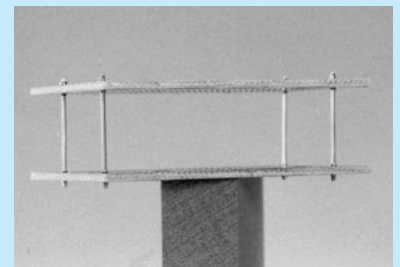

For two-tiered installation (fixed type) [DG series] (1000pcs/pack)



- This is used for mounting PC boards by two-tiered installation.
- External diameter is ϕ 2.0 and is recommended when strength is required and when a large current is applied.
- Material: Copper
- Finish: Gold plating over nickel base
- Rated current: 30A
- Printed board fitting hole diameter: ϕ 2.1



Example of usage



Part number	L (mm)	(A)
DG- 3	3	0.5
DG- 4	4	0.5
DG- 5	5	0.7
DG- 6	6	1.0
DG- 7	7	1.0
DG- 8	8	1.0
DG- 9	9	1.0
DG-10	10	1.0
DG-12.5	12.5	1.0
DG-15	15	1.0
DG-17.5	17.5	1.0
DG-20	20	1.0
DG-25	25	1.0
DG-30	30	1.0
DG-35	35	1.0
DG-40	40	1.0

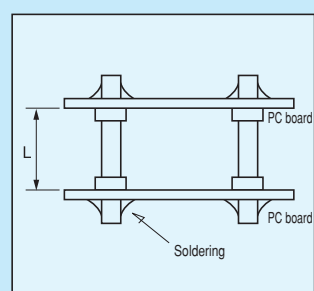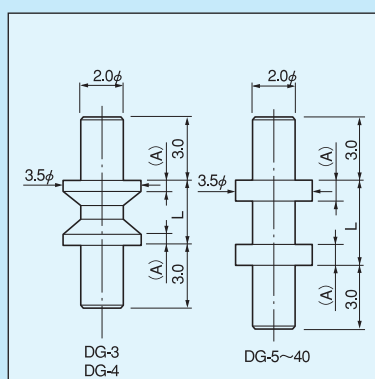

For two-tiered installation