


Jumper socket (Pitch: 2 mm) [Part number: JS-2] (100pcs/pack)


- By combining with WC-20-3.2, WCW-20-3.2 , WCA series or HWC-2P-G , switching function is available.
- Material Contact part: Phosphor bronze
Resin part: LCP black (UL94V-0)
- Finish Contact part: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 125V AC, DC
- Contact resistance: 20mΩ or less
- Adaptive male pin diameter: 0.5mm, P=2.0
- Insertion / Removal forces: 150g or over
- Operating temperature range: -40 to +125°C

How to order:


JS-2

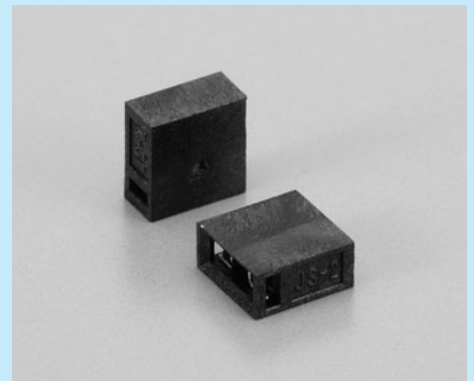

Example of usage

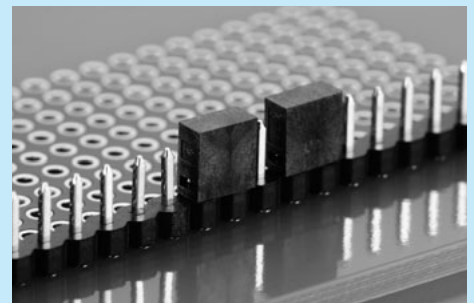

Combination with WC-20-3.2

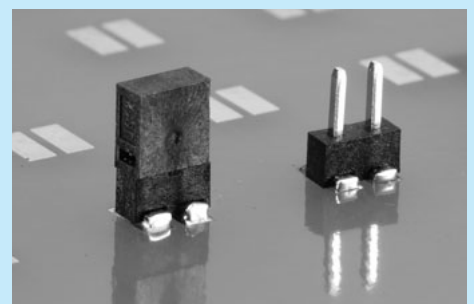

Combination with HWC-2P-G

