


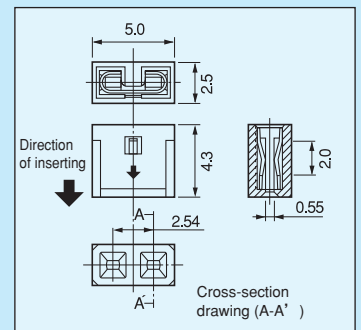
Jumper socket (for the pitch of 2.54 mm) [Part number: JS-1] (100pcs/pack)

- By combining with WL-1, WLW-1, WLA-1-2, WLA-2-2, switching function is available.
- Material Contact part: Phosphor bronze
Resin part: PBT (UL94V-0), color: black, red, yellow, green, blue, white.
- Finish Contact part: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 250V AC, DC
- Contact resistance: 20mΩ or less
- Adaptive male pin diameter: 0.64□、P=2.54
- Insertion / Removal forces: 70g or over
- Operating temperature range: -40 to +125°C

■ How to order:

JS-1 Red

 Please fill in the color.
 (black, red, yellow, green, blue, white)
 If the color is not specified, we will deliver the black one.


■ The connected type is JSW-1




Jumper

Jumper socket for wrapping (for the pitch 5.08 mm) [Part number: JS-3] (100pcs/pack)


- By using the 0.64□ wrapping pin, you can switch ON / OFF.
- This product applies to the pitch 5.08 mm.
- The mating pin for JS-3 is WL-1-2P: P = 5.08, or WL-8-2P: P = 5.08.
Please contact us, if you have any inquiry.
- Material Contact part: Phosphor bronze
Resin part: PBT black (UL94V-0)
- Finish Contact part: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 250V AC, DC
- Contact resistance: 20mΩ or less
- Adaptive male pin diameter: 0.64□、P=5.08
- Insertion / Removal forces: 70g or over
- Operating temperature range: -40 to +125°C

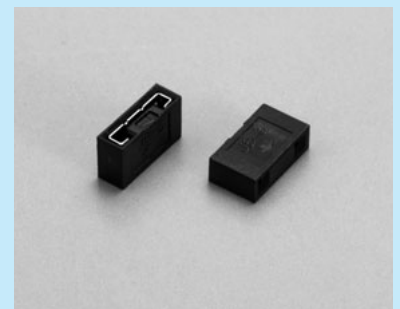

■ Example of usage

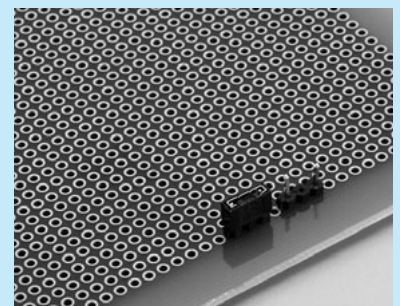

Combination of JS-3 and WL-1-2P: P = 5.08

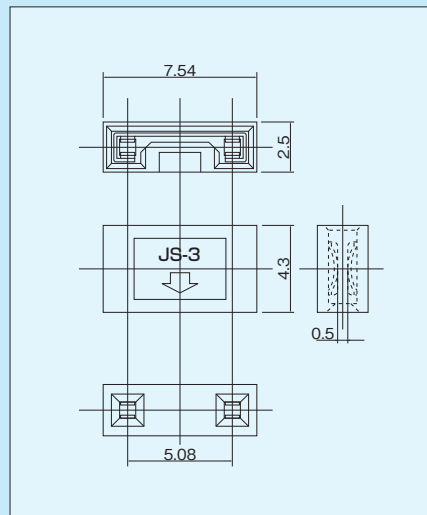

■ Part number

Part number	Pitch of the male pin	Adaptive male pin diameter
JS-3	5.08	0.64 □