



Connected jumper socket [Part number: JSW-1] (10pcs/pack)


- By combining with WLW-1, WLT-1 or HWW-20PW , concurrent switching of up to 20 circuits is available.
- We will cut to the desired number of poles and deliver.
- Material Contact part: Phosphor bronze
Resin part: PBT black (UL94V-0)
- Finish Contact part: (Contact part) Gold plating over nickel base
(Other) Nickel plating
- Rated current: 3A
- Rated voltage: 250V AC, DC
- Contact resistance: 20mΩ or less
- Adaptive male pin diameter: 0.64mm
- Insertion / Removal forces: 70g or over
- Insertion / Removal frequency: 100 times or less
- Operating temperature range: -40 to +125°C

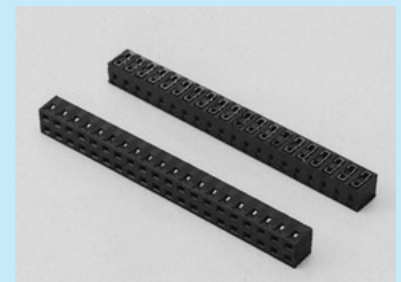

Example of usage

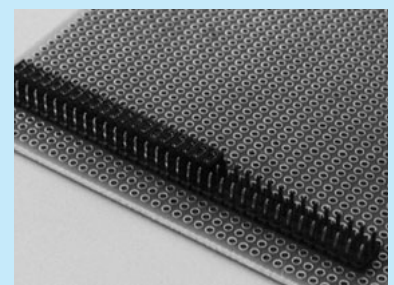

Combination of JSW-1 and WLT-1

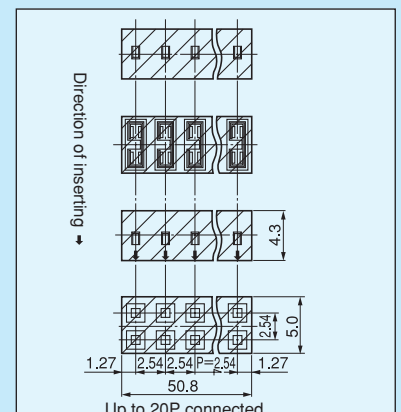

How to order:

JSW-1-5P



Please fill in the desired number of poles.
(If the number is not specified, we will deliver 20P.)

* We can receive order for 2P or more.
[If you order 1P, please use JS-1]

Tool for pulling out connected jumper socket [Part number: JSWJ-01] (1pc/pack)

- When using JSW-1 with many poles, large force is required to pull it out. If it is difficult to pull it out, please use the tool for pulling out.

How to use

Put the JSWJ-01 over JSW-1 and shake it side by side to pull out.

How to order

Part number: JSWJ-01



Example of usage

