LED spacer (connected type) [LR series] (10pcs/pack)

- This LED spacer can be used for an LED with the head diameter of ϕ 3 and ϕ 5.
- 20P is connected with a pitch of 2.54 mm. This is used for arranging LEDs consecutively.
- Please use the product by cutting to the desired number of poles.
- Please used the mold cutting nipper (Part number: MOC-3). (Also, we can cut the product. Please refer to the following section of how to order.)
- This can be used vertically and horizontally and it can also fit to a three-legged LED.
- Material: PCT resin (UL94V-0)
- Color: Black
- Operating temperature range: −40 to +125℃

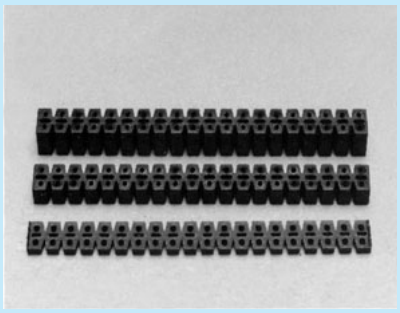

Part number	H (mm)
LR-1	1.0
LR-1.5	1.5
LR-2	2.0
LR-2.5	2.5
LR-3	3.0
LR-3.5	3.5
LR-4	4.0
LR-4.5	4.5
LR-5	5.0
LR-5.5	5.5
LR-6	6.0

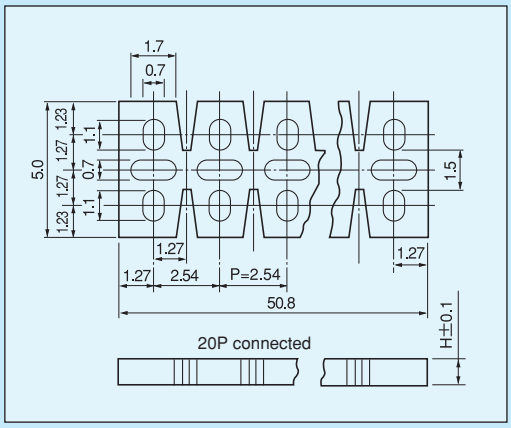

■ Example of usage

- Vertical fitting

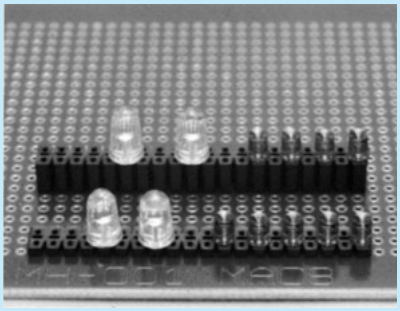

- Horizontal fitting

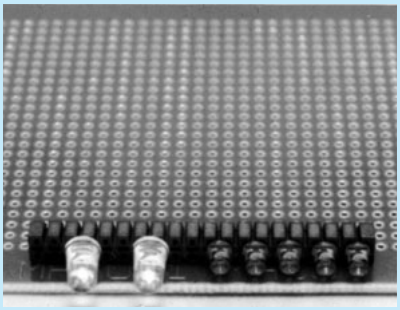

■ How to order

LR-6-5P
~
Please fill in the desired number of poles. (Maximum number: 20P)

* If the number of poles is not specified, we will deliver 20P.