
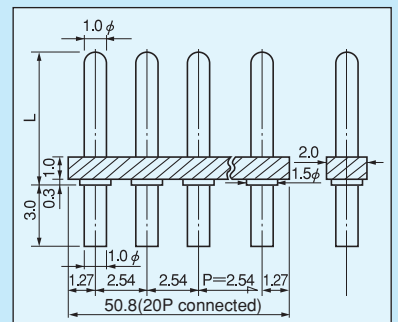


**Male pin terminal of connected type [MK series] (10pcs/pack)**

- This type has 20 pins of  $\phi 1.0$  connected with a pitch of 2.54 mm.
- Please use this product by cutting it to the desired number of poles.
- Please cut it by using a mold cutting nipper (Part number: MOC-3)
- Material Pin part: Phosphor bronze  
Resin part: PCT black (UL94V-0)
- Finish Pin part: Gold plating over nickel base
- Specifications  
Rated current: 5A  
Rated voltage: 125V AC, DC  
Withstand voltage: 1000V AC, DC per minute  
Insulation resistance: 500M $\Omega$  or over
- Operating temperature range: -40 to +125°C
- Printed board fitting hole diameter:  $\phi 1.2$

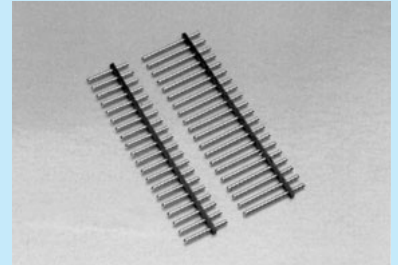


**Part number**

Part number	L (mm)
MK-5.3	5.3
MK-8	8.0
MK-13	13.0
MK-18	18.0
MK-23	23.0
MK-28	28.0

**Example of usage (When used for two-tiered installation)**


- Please use PM-7 on the socket side when using this for mounting PC boards by two-tiered installation.



Part number	H (mm)
MK-5.3	7.3
MK-8	9
MK-13	14
MK-18	19
MK-23	24
MK-28	29

This indicates the distance (H) between the boards when MK series and PM-7 are combined.

**Example of usage**

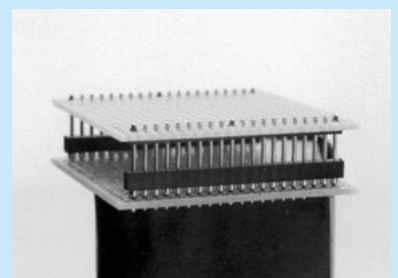

For two-tiered installation