




For insertion / removal of two-tiered type [SX series] (1000pcs/pack)

- This is used for mounting PC boards with a pitch of 1.778 mm by two-tiered installation.
- Material: Brass
- Finish: Gold plating over nickel base
- Adaptive socket pin: PD-6, PM-6




Part number	A	H	Printed board fitting hole diameter
SX-001	0	4.7	φ 0.6
SX-002	2.3	7.0	φ 0.6
SX-003	5.3	10.0	φ 0.6
SX-004	7.8	12.5	φ 0.6
SX-005	10.3	15.0	φ 0.6

* The dimension H indicates the distance between the main board and the slave board when PD-6 or PM-6 used.

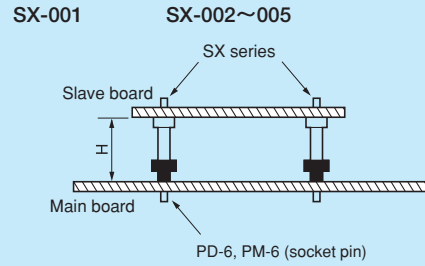

For insertion / removal of two-tiered type (Pitch: 1.778 mm) [SY series] (10pcs/pack)




- This is used for mounting PC boards with a pitch of 1.778 mm by two-tiered installation.
- Pitch: 1.778 mm, 21 pins connected
- Please cut it to the desired number of poles by using a mold cutting nipper (Part number: MOC-3).
- Material Pin: Brass, Finish: Gold plating over nickel base
Resin: PBT black (UL94V-0)
- Operating temperature range: -40 to +125°C
- Adaptive socket: PD-6, PM-6

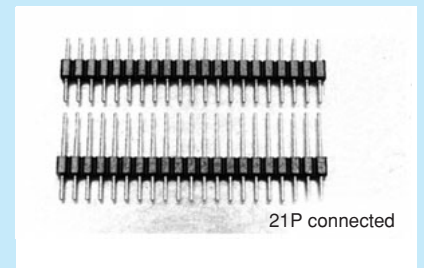

Part number	A (φ)	B	H	Printed board fitting hole diameter
SY-002	0.45	0	7.2	φ 0.6
SY-003	0.6	2.8	10.0	φ 0.6
SY-004	0.6	5.3	12.5	φ 0.6
SY-005	0.6	7.8	15.0	φ 0.6
SY-006	0.6	12.8	20.0	φ 0.6

* The dimension H indicates the distance between the main board and the slave board when PD-6 or PM-6 used.

Example of usage

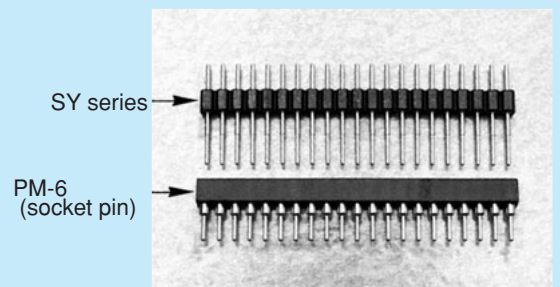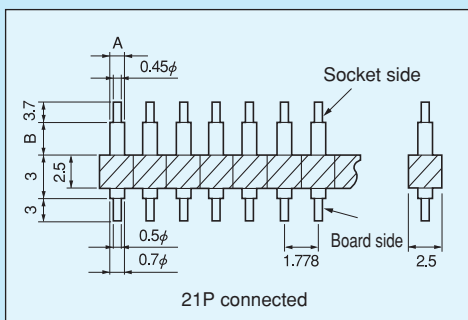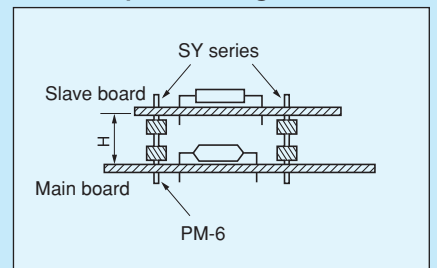

For two-tiered installation