



**Wrapping terminal of three-row connected type [WLT series] (10pcs/pack)**

- This wrapping terminal is of three-row connected type with a pitch of 2.54 mm.
- By combining the jumper socket JSW-1 and the WLT-1-20PT, 20 circuits can be switched at one time.
- Material Resin part: PBT black (UL94V-0)  
Pin part: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 3A
- Insulation resistance: 500MΩ or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: -40 to +125°C
- Printed board fitting hole diameter: 1.0 to φ 1.1

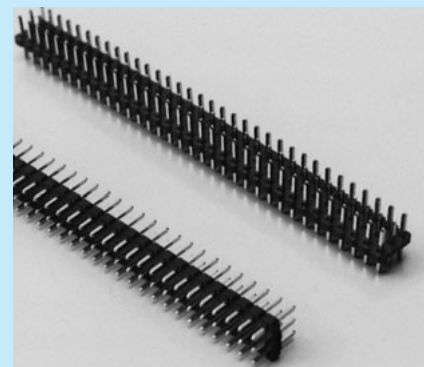

**Example of usage**

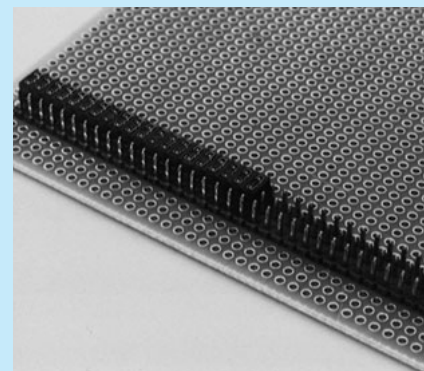

Combination of WLT-1-20PT and JSW-1

Part number	A	B
WLT-1	4.3	6.0
WLT-8	8.0	9.7
WLT-10	10.0	11.7
WLT-12	12.0	13.7
WLT-14	14.0	15.7

**How to order:**


WLT-1-10PT



Please fill in the number of poles per row.  
The maximum number is 34PT.  
For 10PT,  $10P \times 3 = 30P$ .

\* If the number of poles is not specified,  
we will deliver the maximum number of poles, 34PT.

\* For an order of WLT-1-1PT, please order WL-1-3P.

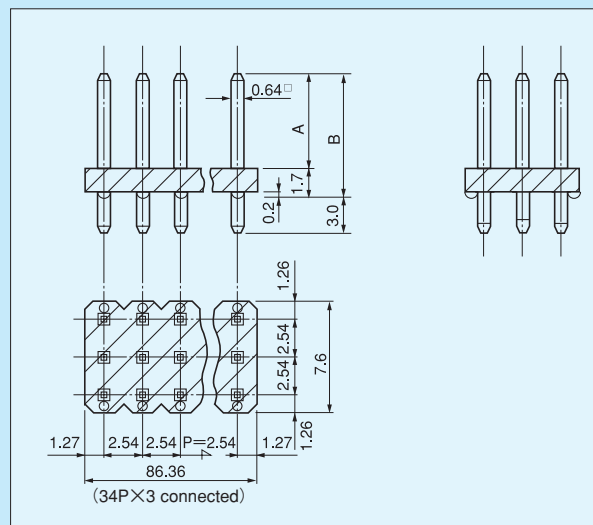

For wrapping