


**Adjustment part terminal for surface mounting [HMR series] (10pcs/pack)**

- This is used for fitting a lead type resistor, capacitor, etc. on a surface mounting board.
- Material Resin part: PCT resin black (UL94V-0)  
Pin part: Phosphor bronze
- Finish: Gold plating over nickel base

**Part number**

Part number	H
HMR-4	4
HMR-6	6
HMR-8	8
HMR-10	10

**Recommended land diameter**

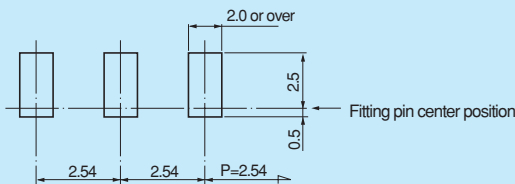


**How to order**

HMR-4-10P


Please fill in the desired number of poles.  
(If the number is not specified, we will deliver the part of the maximum number of poles, 20P.)

**Instructions for mounting**


In the case that a warpage occurs on the resin part during reflow because many pins are connected for use, apply an adhesive to several places.

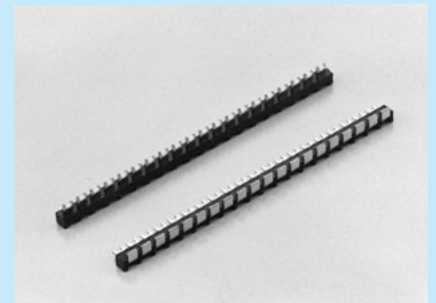

**Example of usage**

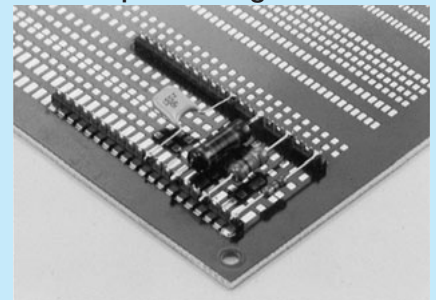



**Dimension**

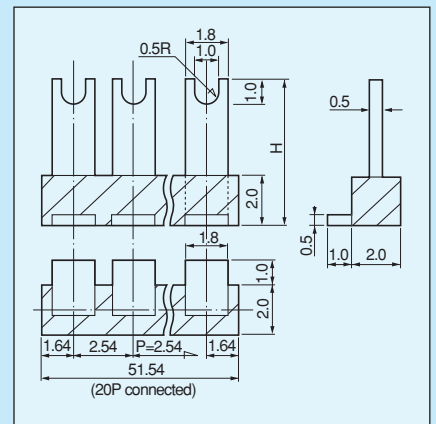


**For lead part fitting [QH series] (100pcs/pack)**

- This is used for fitting a lead part to a surface mounting board.
- After soldering this product to the surface mounting board, please insert the lead part in the hole and solder it.
- Material: Brass
- Finish: Tin plating over nickel base

Part number	A	B	Recommended land diameter
QH-25-08	0.8	2.0	3 φ
QH-25-11	1.1	2.0	3 φ
QH-25-16	1.6	2.5	3.5 φ

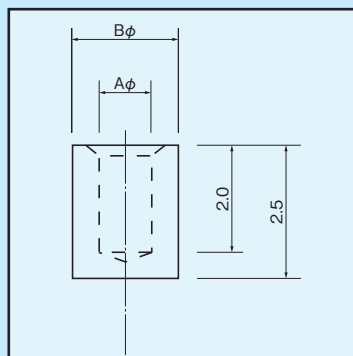

**Example of usage**



For surface mounting