



Male pin for HH-20 [OJ series] (100pcs/pack)

- This male pin is used for HH-20 series connector arranged with a pitch of 2.54 mm.
- The OJ series is used by fitting to the housing (OH series).
- OJ series Material: Brass

Finish: Gold plating over nickel base

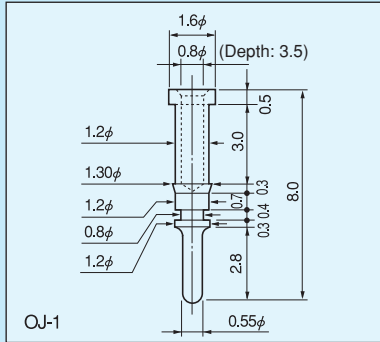


Used for horizontal fitting

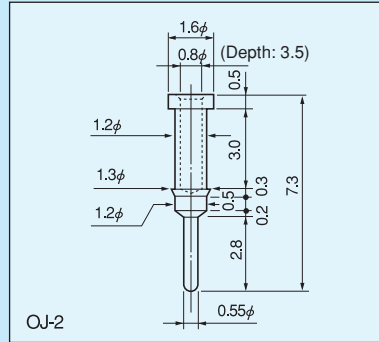

Used for vertical fitting




Example of usage Horizontal fitting

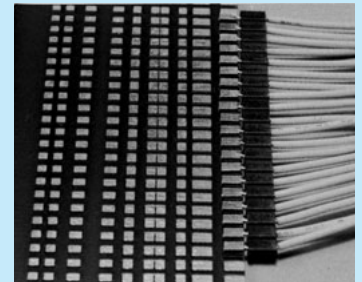


Part number

Part number	Fitting method	Crimping tool	Press-fit tool
OJ-1	Horizontal	OMXT-1	OMXT-3 & OMXT-4
OJ-2	Vertical	OMXT-1	OMXT-3 & OMXT-2


How to use

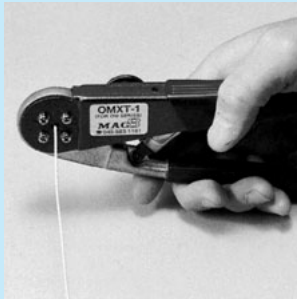


Crimp the electric wire to OJ series by using the crimping tool OMXT-1.

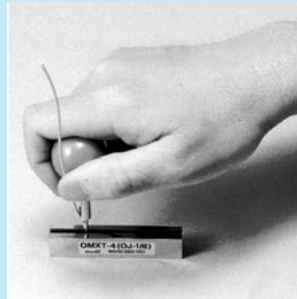

Press-fit OJ series pin to the housing (OH series) by using the tool OMXT-3, OMXT-2 (OJ-2), or OMXT-4 (OJ-1).

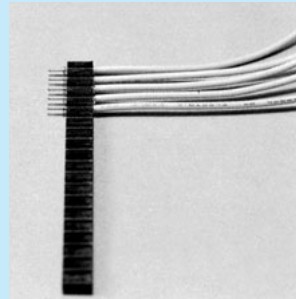

The finished state of the male pin

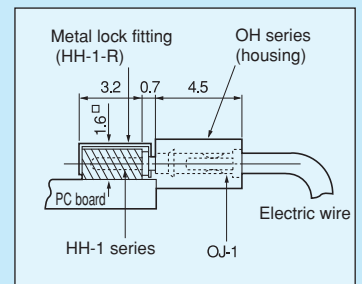

It will not be taken off if the metal lock fitting (HH-1-R) is used.

Housing [OH series] (100pcs/pack)


- This housing is used for fixing OJ series.
- The tool to press-fit to the housing is OMXT-3, OMXT-2 (OJ-2) or OMXT-4 (OJ-1).

Specification

Material	PBT resin (UL94V-0)
Color	Black
Temperature range	-40 to +125°C
Number of pins	Maximum number: 20P
No.1 indication	White marking



Dimension

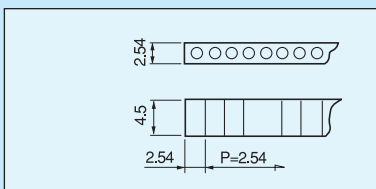

How to order

OH-3



Please fill in the desired number of poles. (Maximum number. 20P)